

69M Series

Sealed Wire Terminal


CPE/Premise Wiring

Headend/CO

MDU

Utility/Municipality

Wireless

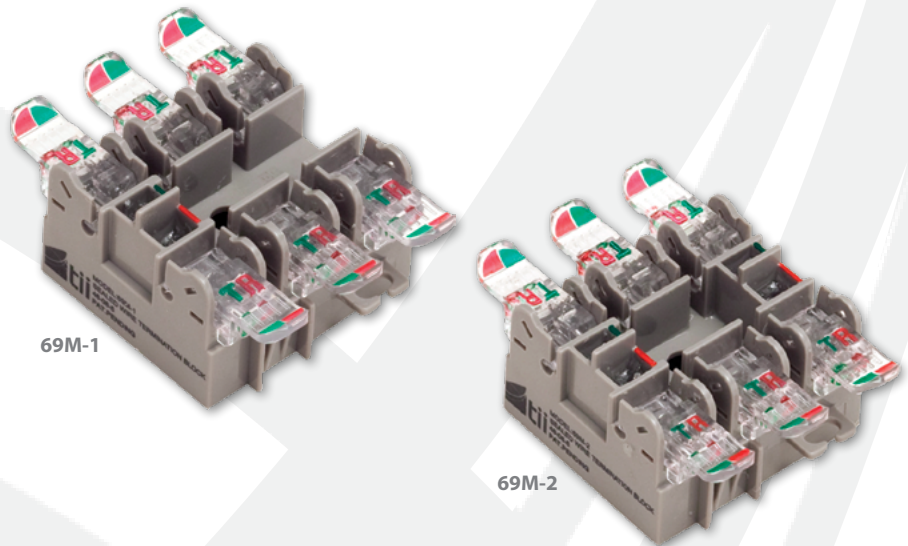

The 69M Series Sealed Wire Terminal is designed for applications requiring more than one parallel connection (extension) to a single or two pair service. This product is an ideal fit for Voice Over Internet Protocol (VoIP) networks.

KEY PRODUCT BENEFITS

- ▶ Offers multiple extension connections for one or two VoIP or POTS lines
- ▶ Incorporates integral sealed test points – no additional loose test clips required
- ▶ Accommodates multiple extension connections for one or two line VoIP (or POTS) signals
- ▶ Equipped with side wire looms for easy wire management
- ▶ Terminations are made to gel-sealed insulation displacement contacts (IDC) by means of convenient tool-less rocker assemblies. Wire stripping is not required.
- ▶ Compact, low profile design fits into applications where space is limited
- ▶ May be mounted via screws to a suitable flat surface or installed in a Tii indoor/outdoor wire terminal housing
- ▶ Designed to mount in either Tii's 162 or 168 Series enclosures
- ▶ Accepts 26 through 22 gauge solid conductor wire sizes

INDUSTRY STANDARDS

- ▶ CAT-6 Compliant
- ▶ Listed to cUL and UL 1863



Tii Technologies Inc.

Corporate Headquarters:

141 Rodeo Drive
Edgewood, NY 11717


Phone: 631.789.5000

Fax: 631.789.5063

Toll Free: 888.844.4720

sales@tiitech.com

67M Series

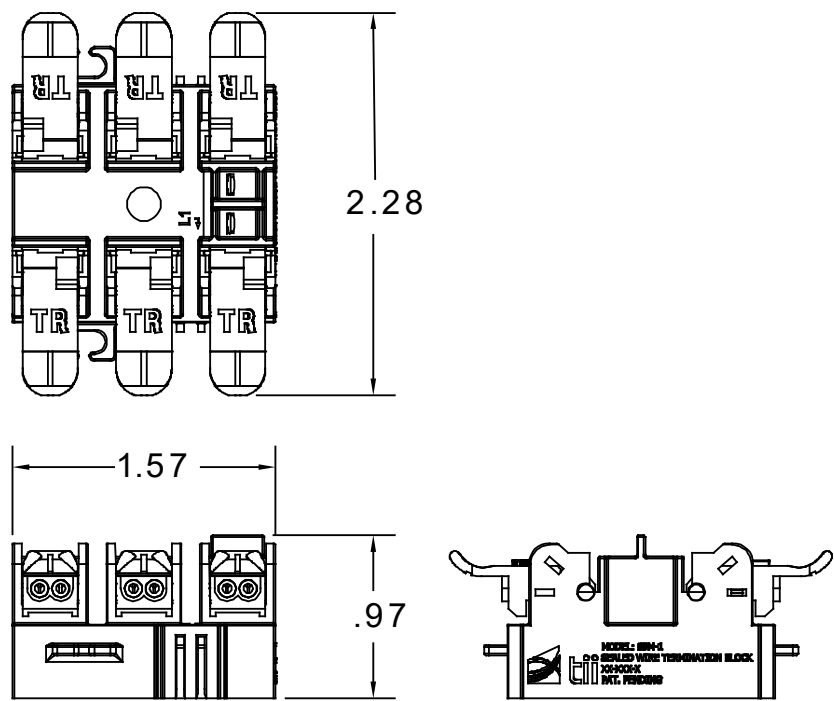

Dimensions are in Inches

ORDERING INFORMATION

Model No.	Description
69M-1	1 Pair Input, 5 Parallel Pair Outputs, Sealed Wire Terminal with Integral Sealed Test Points
69M-2	2 Pair Inputs, 2 Individual 2 Parallel Pair Outputs, Sealed Wire Terminal with Integral Sealed Test Points